

[544] Linux Pipelines

Meenakshi Syamkumar

Learning Objectives

- chain multiple Linux programs together into a pipeline
- redirect process output to a file
- observe resource consumption on Linux

Unix Philosophy

1. "Make each program do one thing well. To do a new job, build afresh rather than complicate old programs by adding new 'features'."
2. "Expect the output of every program to become the input to another, as yet unknown, program. Don't clutter output with extraneous information. Avoid stringently columnar or binary input formats. Don't insist on interactive input."



Supplemental Reading:

[Designing Data Intensive Applications \("Batch Processing with Unix Tools" of Chapter 10\)](#)

The Pipe

Simple Log Analysis


Various tools can take these log files and produce pretty reports about your website traffic, but for the sake of exercise, let's build our own, using basic Unix tools. For example, say you want to find the five most popular pages on your website. You can do this in a Unix shell as follows:¹

```
cat /var/log/nginx/access.log | ❶  
awk '{print $7}' | ❷  
sort | ❸  
uniq -c | ❹  
sort -r -n | ❺  
head -n 5 | ❻
```



the pipe connects output of one process to input of the next



Standard Input and Output (I/O)

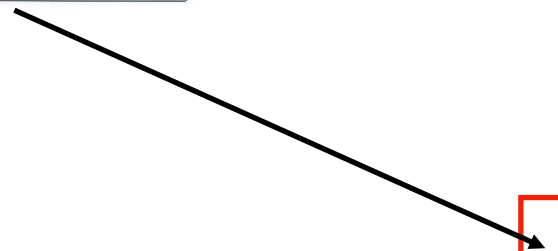


stdin

stdout

process A

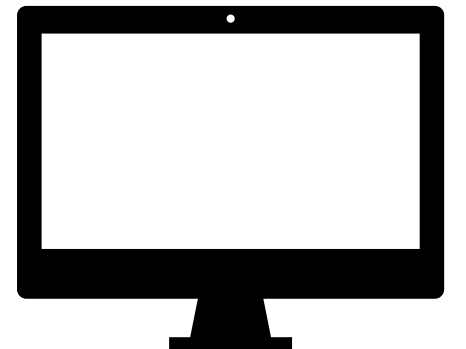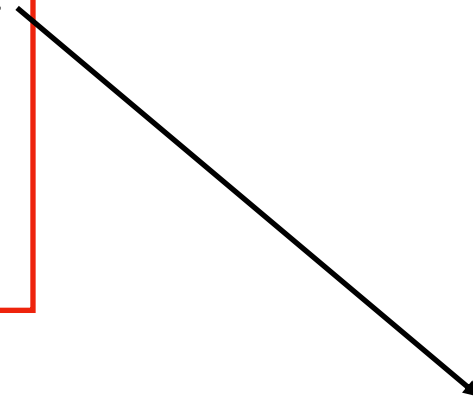


stdout => stdin

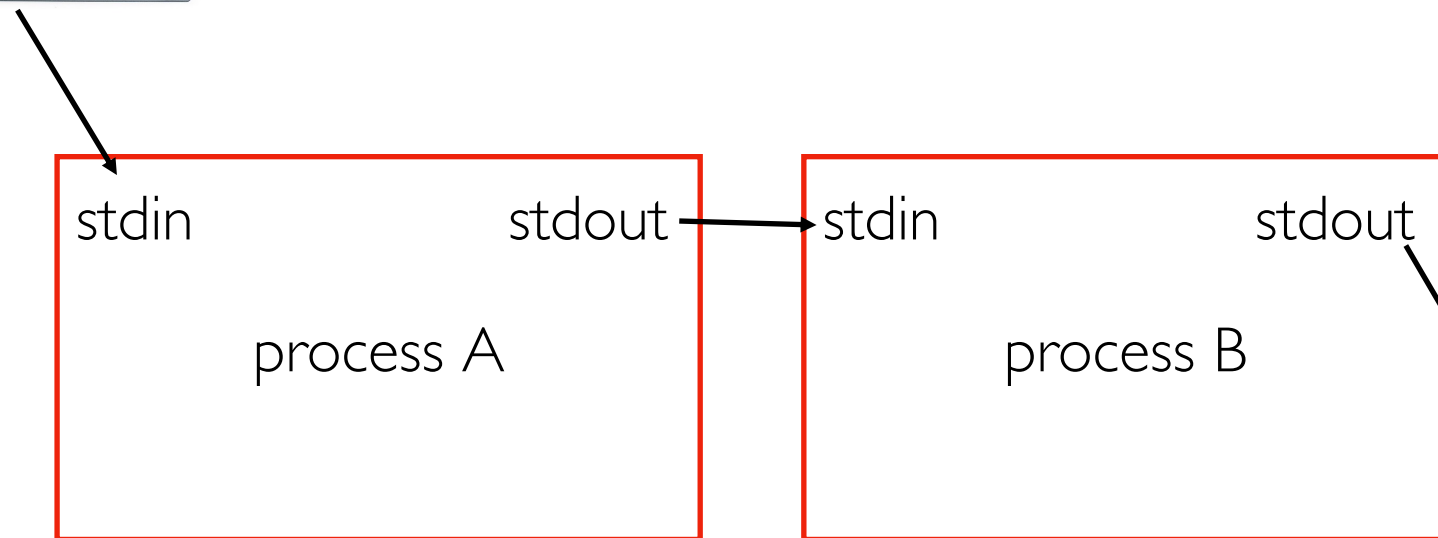


Command:


A | B

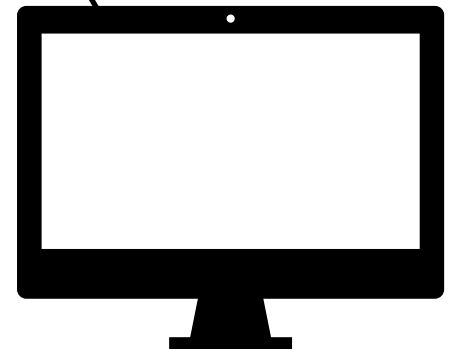


Chains can be long

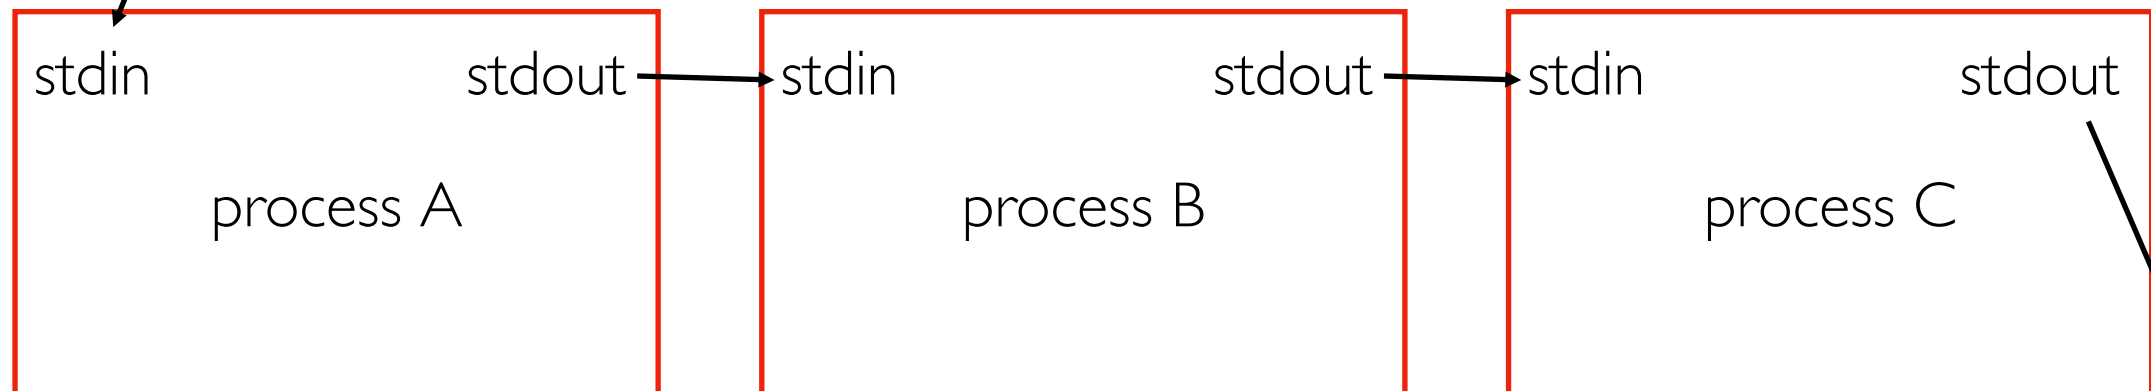


Command:
A | B | C

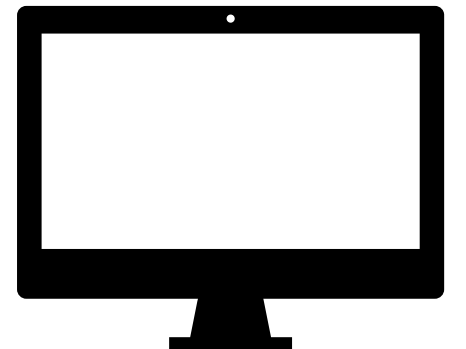




stderr (for things like warnings that shouldn't be chained)

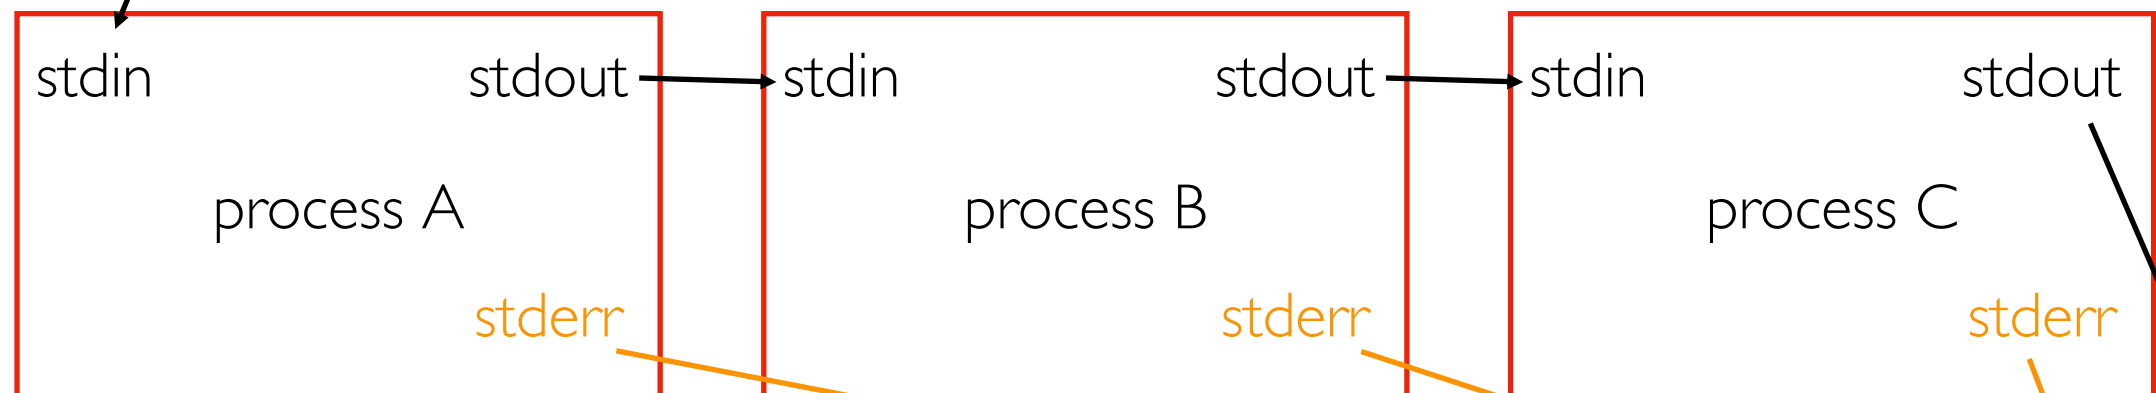


Command:
A | B | C

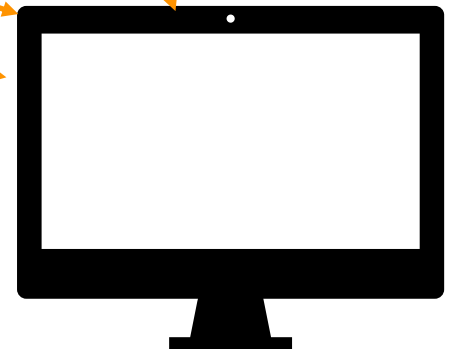



Redirection

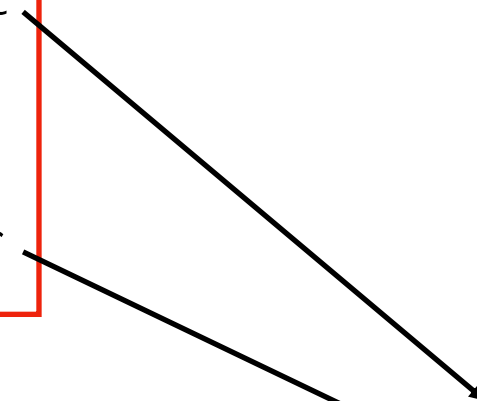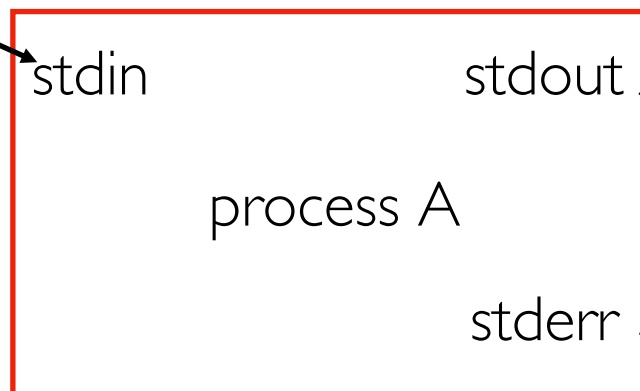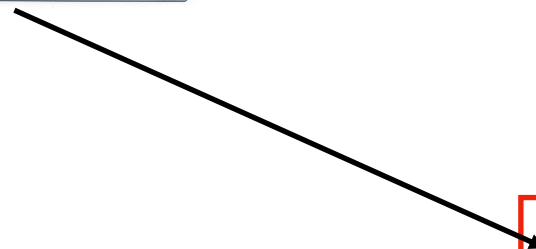

Command:
A

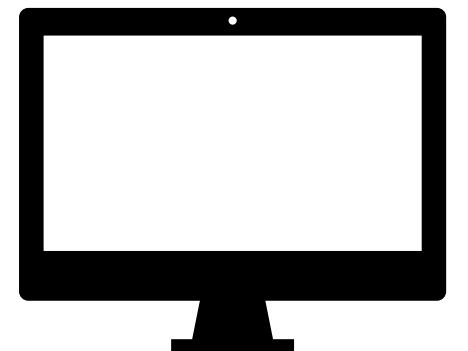

Redirection

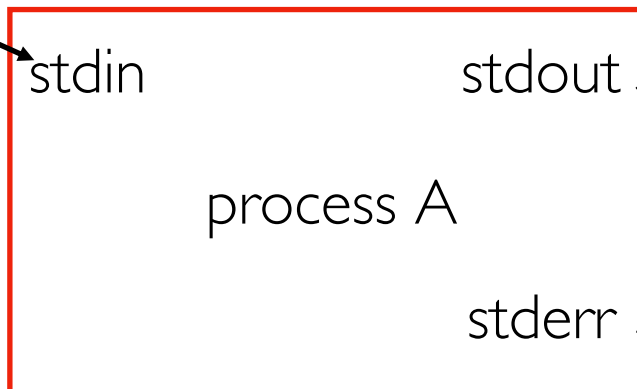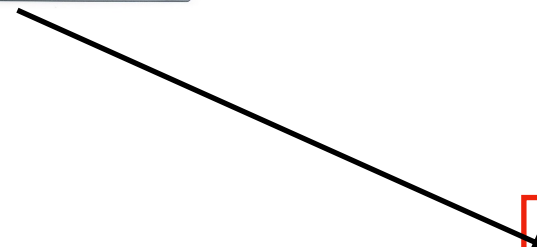




stdout

stdin

process A


stderr

output.txt

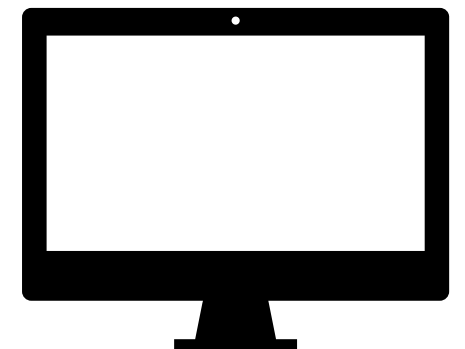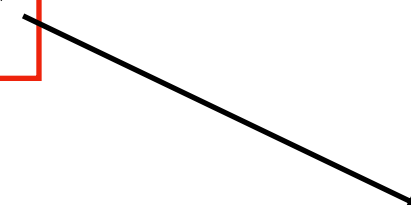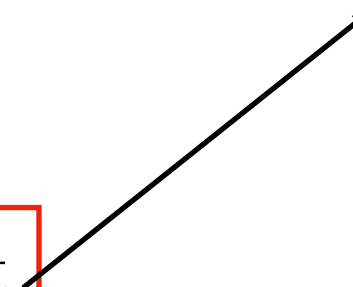

Command:
A > output.txt


Redirection

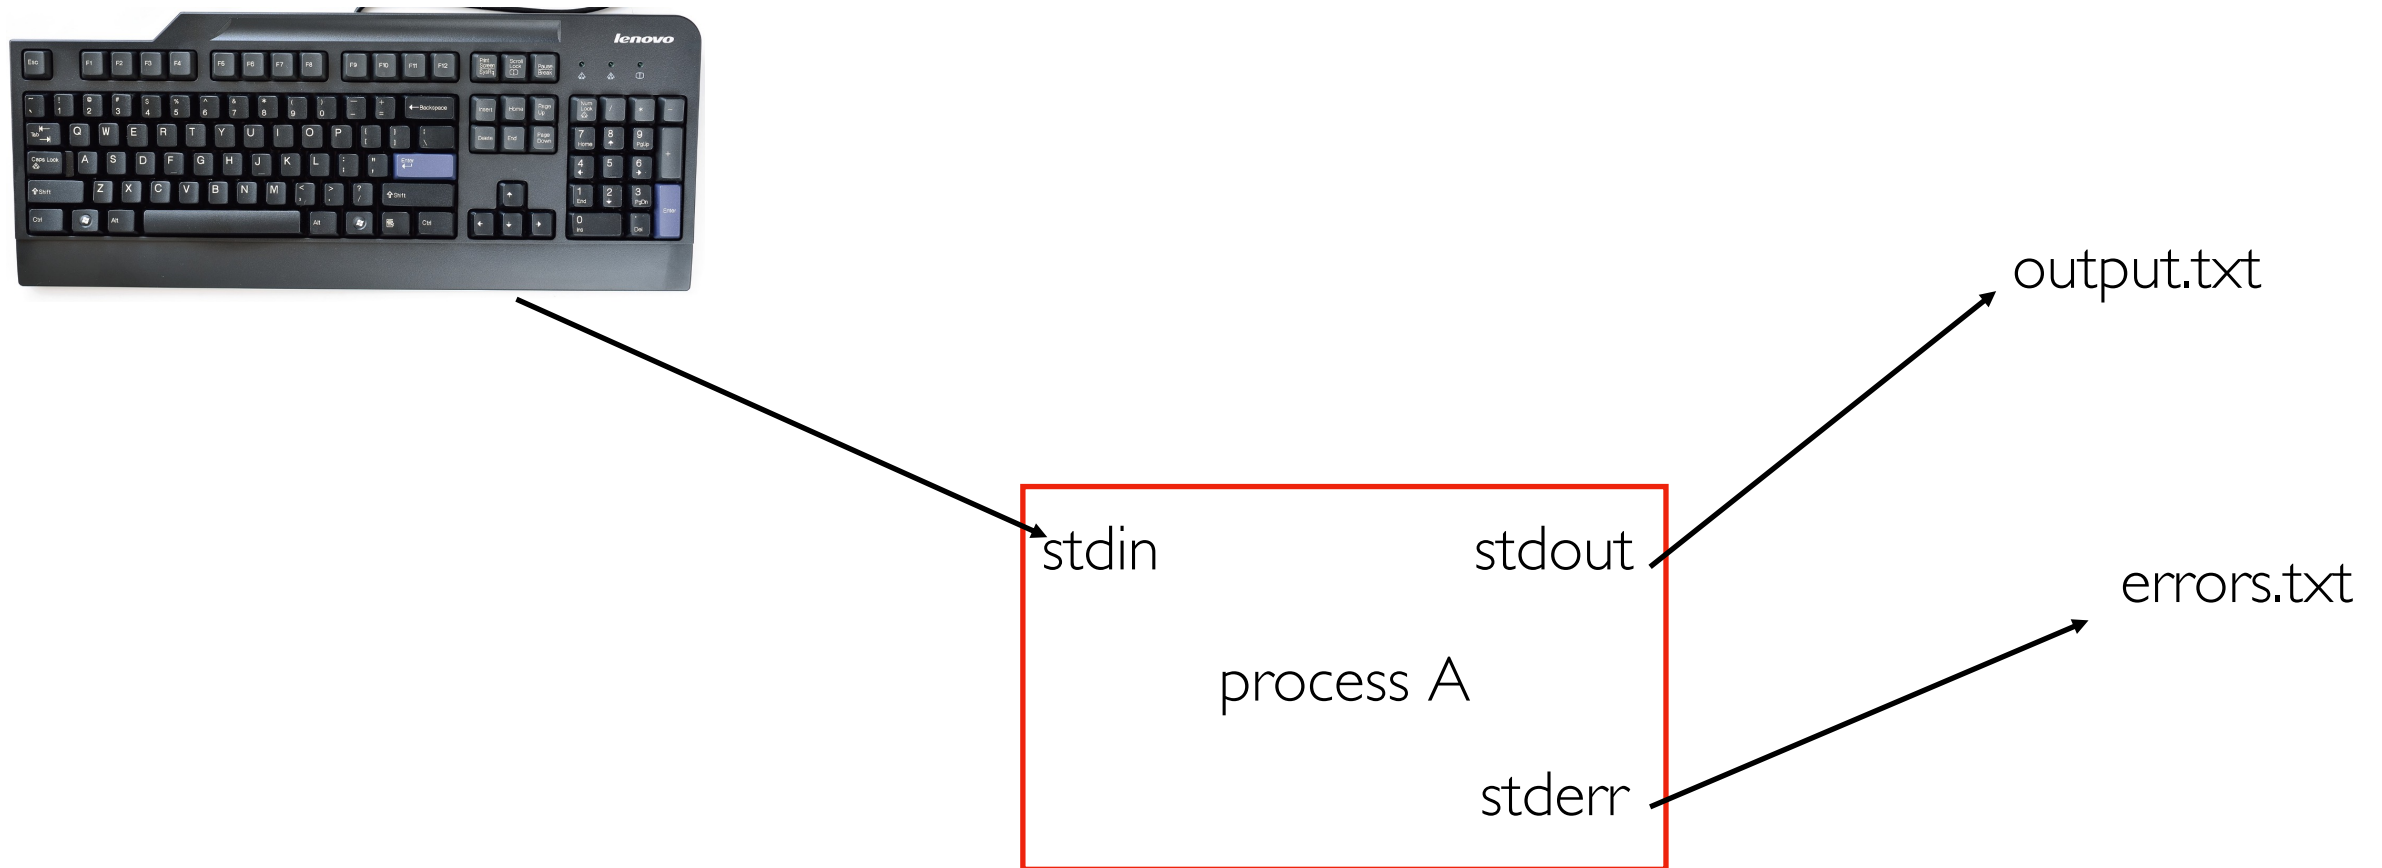

Command:

```
A > output.txt 2> errors.txt
```

Redirection

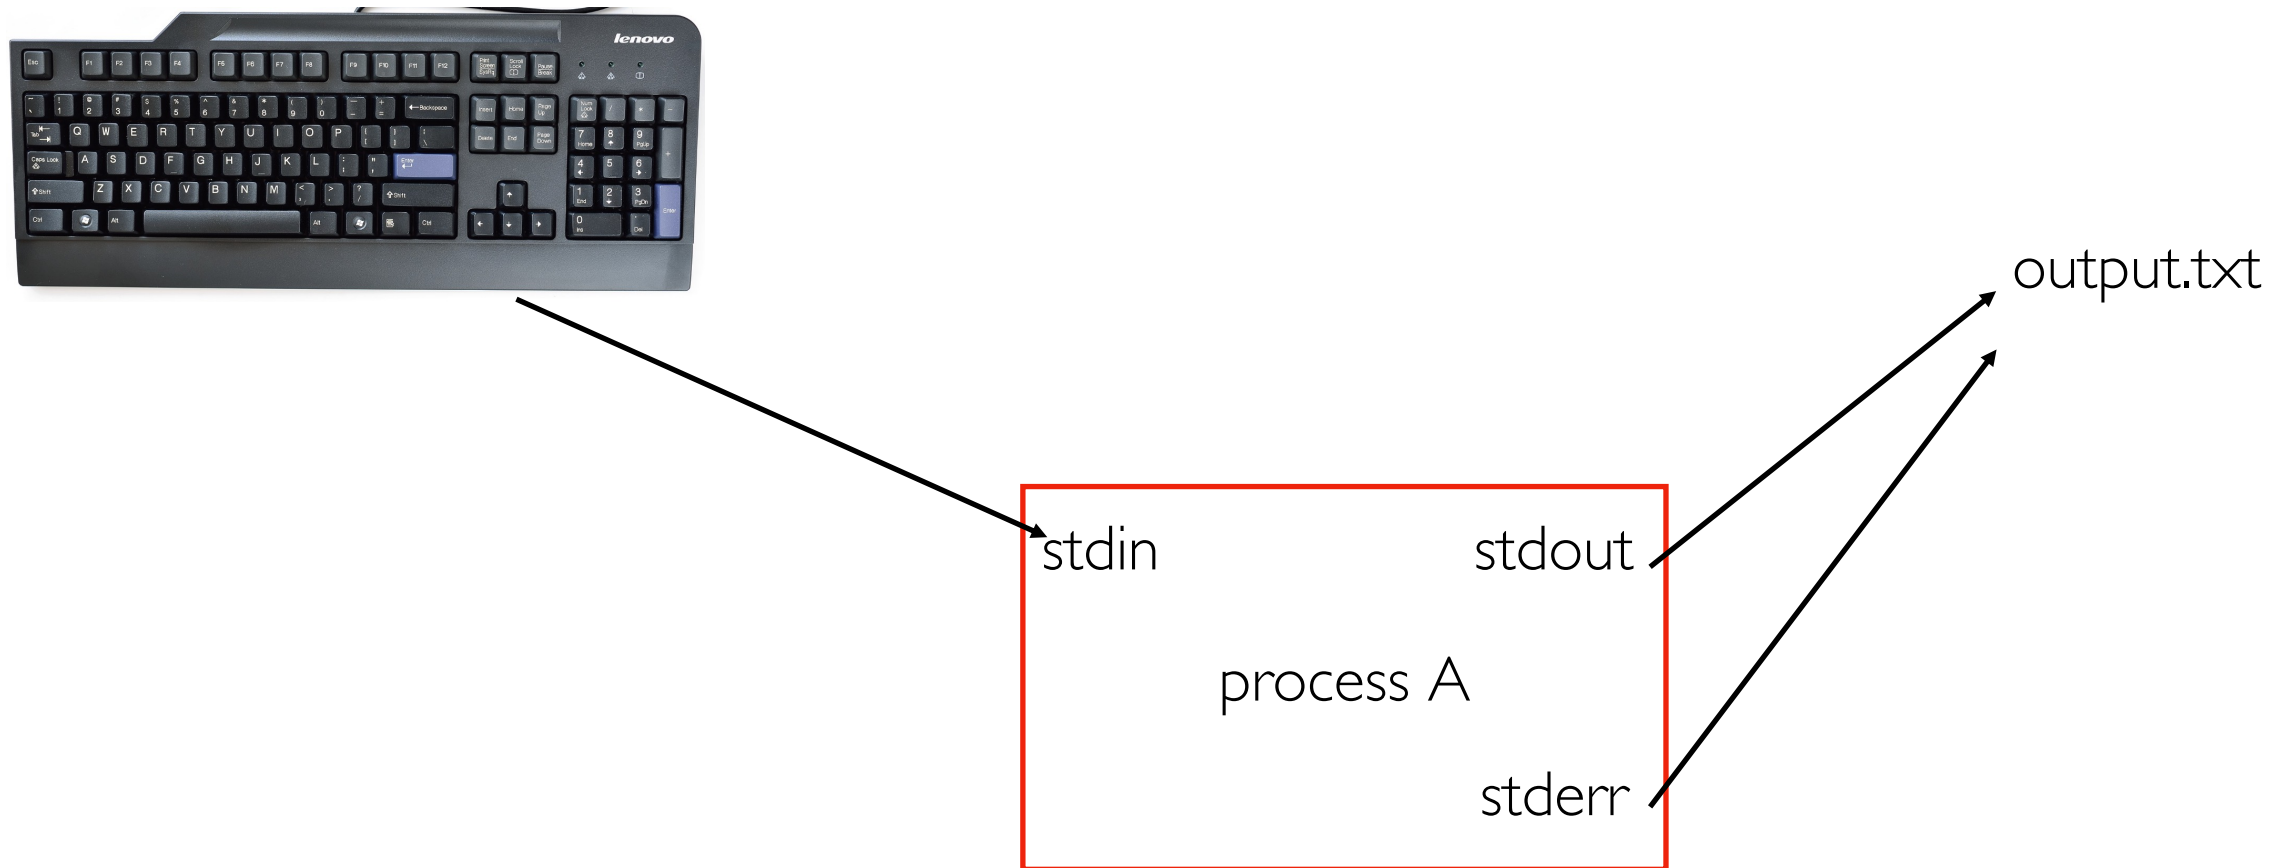


Command:

```
A &> output.txt
```


Async

normally, shells commands are synchronous, meaning you wait for the last command to finish before another prompt appears.

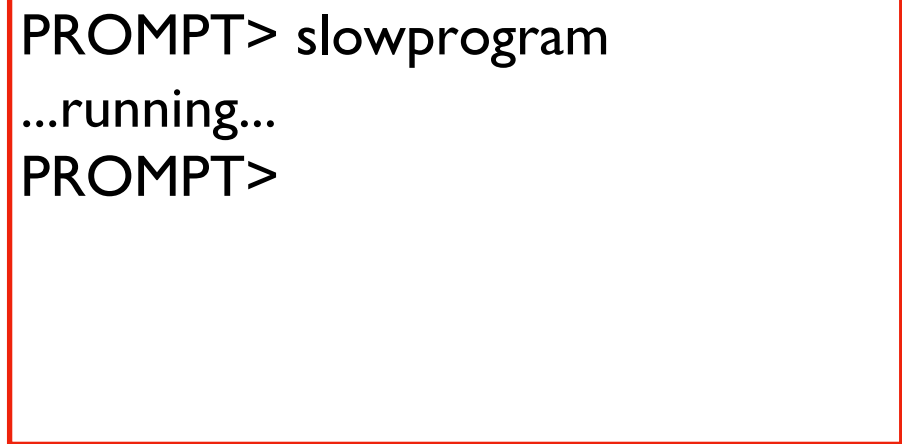

```
PROMPT> slowprogram
...running...
PROMPT>
```

ampersand at the end runs it in the background. you get a prompt immediately

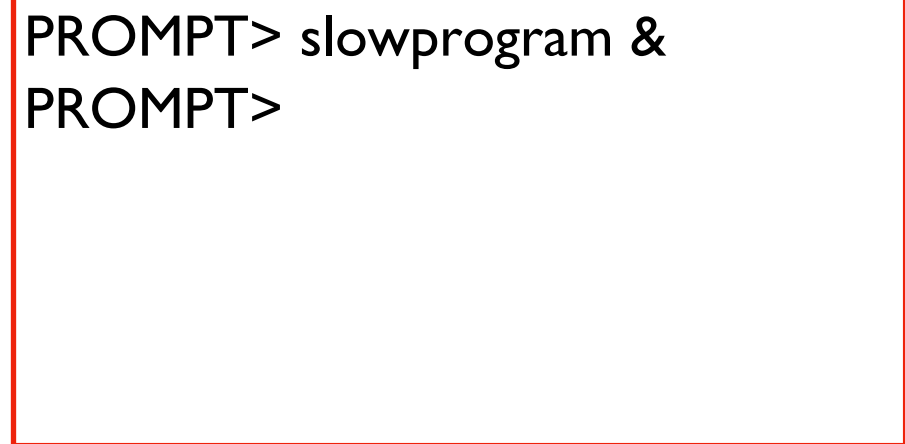

```
PROMPT> slowprogram &
PROMPT>
```

All together


Command:

```
A | B &> out.txt &
```

All together

Command:

```
A | B &> out.txt &
```

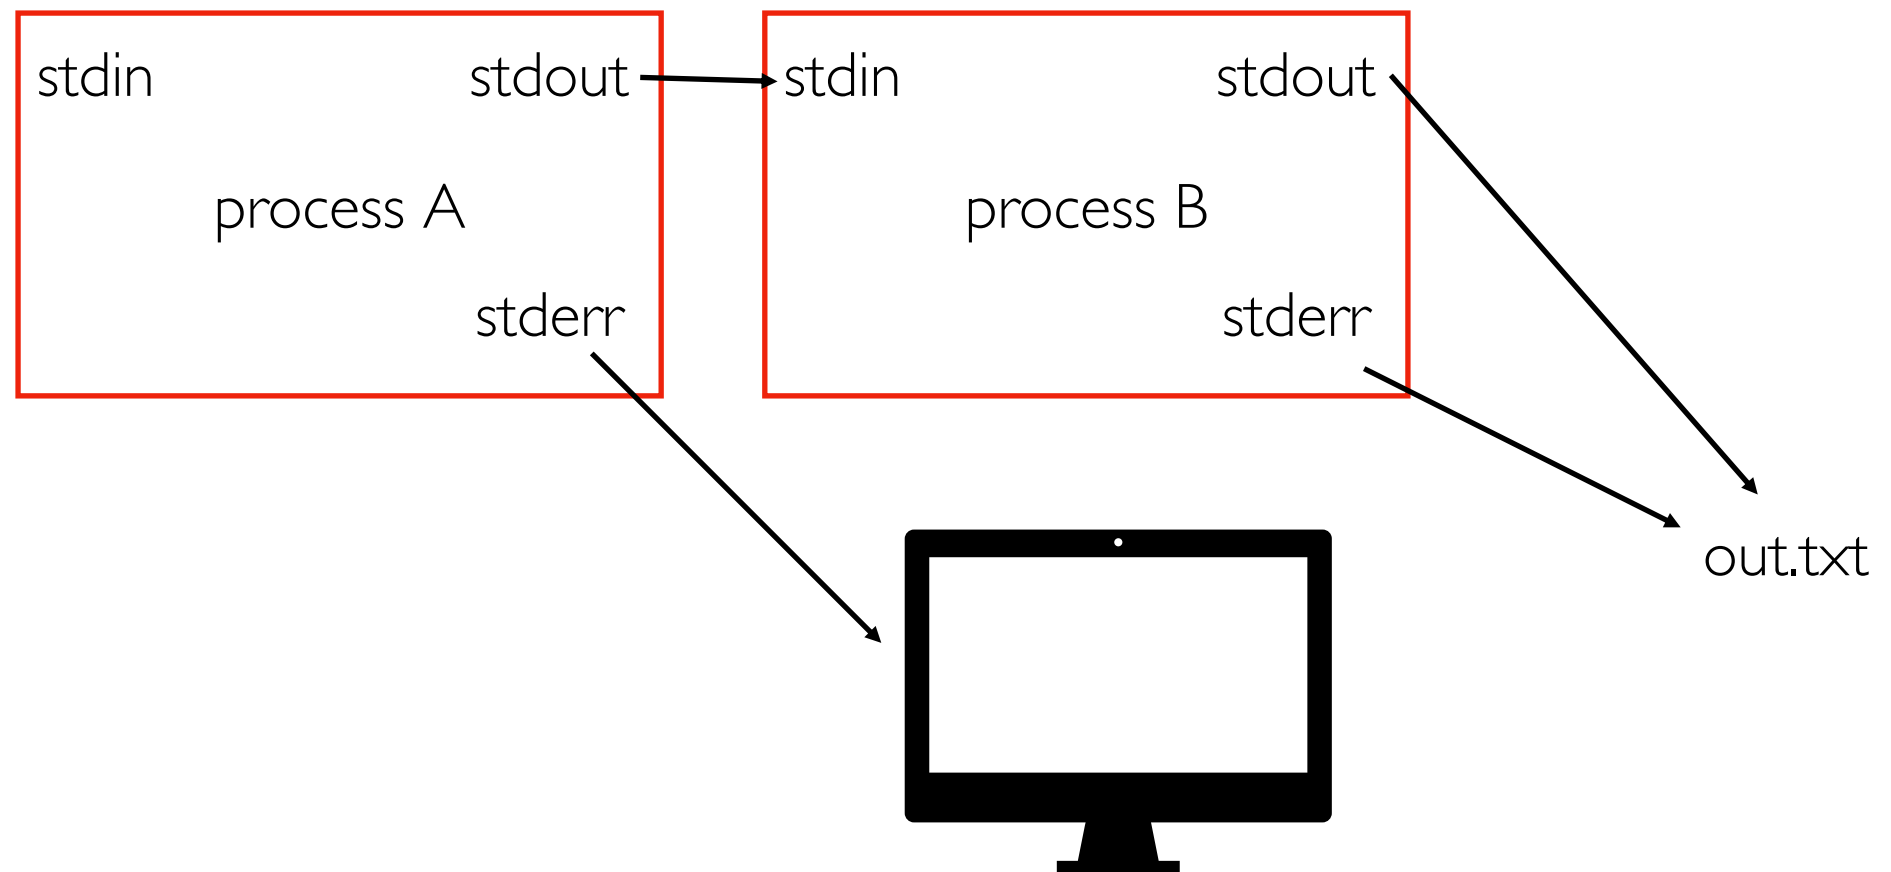

This pipeline will run in the background (perhaps for a long time), and we won't see the output. BUT we can find it later in the `out.txt` file.

Demos...